



束夹  
Beam Clamp

型号 Model

RG-Beam Clamp



铁链与吊环  
Chain with Ring

型号 Model

RG-Chain with Ring



铁链  
Chains

型号 Model

RG-Chains



法兰  
Turnbuckles

型号 Model

RG-Turnbuckles



篷房吊夹  
Marquee Clamp

型号 Model

RG-Marquee Clamp



钢丝绳拉葫芦可提供1600KG的WLL  
Available with a WLL of 1600KG

型号 Model

RG-Wire Rope Pulling Hoist-1600



美式卸扣  
Shackle

型号 Model

负载 WLL

RG-Shackle-3.25T 3.25T

RG-Shackle-4.75T 4.75T



保险钢丝  
Steel Wire

型号 Model

直径 Diameter

RG-Steel Wire-5 Φ5mm

RG-Steel Wire-10 Φ10mm



飞机带/捆绑带 一体式  
Ratchet Strap


型号 Model

长度 Length

RG-Ratchet Strap 3m



## 安全器具 SAFETY RIGGING

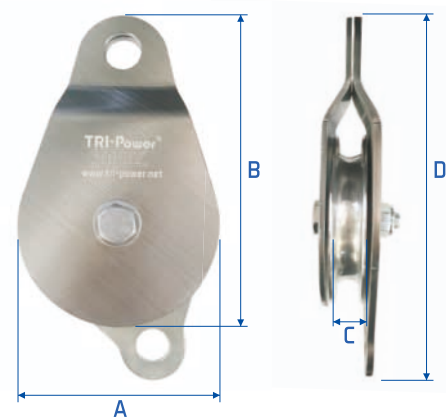

### 铝合金滑轮 Lever hoist

型号 Model	绳子 Rope	自重 Dead weight	负载 load	A	B	C	D
RG-Pulley6-100	6mm	1.00kg	2000kg	100	167	11	200
RG-Pulley12-100	12mm	1.05kg	2000kg	100	167	16	200

材质: 铝合金  
Material: Aluminum Alloy

特性: 防腐防锈结实耐用  
Characteristic: Anti-corrosion, rust-proof, strong and durable

1 inch = 25.4 mm 1 m = 3.28 ft



### 安全绳 Safety rope

型号 Model	长度 Length
RG-Safety rope	1.5m



### 缓冲双大钩安全绳 Buffer safety pendant


型号 Model	长度 Length
RG-Buffer safety pendant	1.5m



### 电缆夹/线夹 Cable Clip

型号 Model	材质 Material
RG-CC RG-CC-B	PVC 塑料

适用于Φ48-61mm桁架  
Fits Φ48-61mm truss tubes

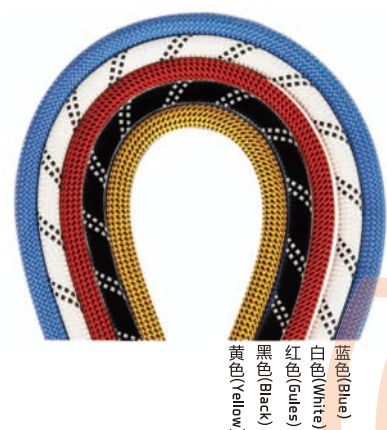

### 登山绳 Climbing Rope

长度, 颜色可根据需求定制  
Lengths and colors are available on request.

型号 Model	直径 Rope	颜色 Color	长度 Length	负载 load
RG-CR-6Y-20m	6mm	黄色(Yellow)	20m	2400kg
RG-CR-6B-20m	6mm	黑色(Black)	20m	2400kg
RG-CR-6G-20m	6mm	红色(Red)	20m	2400kg
RG-CR-6W-20m	6mm	白色(White)	20m	2400kg
RG-CR-6BL-20m	6mm	蓝色(Blue)	20m	2400kg
RG-CR-12B-50m	12mm	黑色(Black)	50m	3300kg

1 inch = 25.4 mm 1 m = 3.28 ft



### 全身安全带(专业版) Body safety belt(Professional)

型号 Model	材质 Material	认证 Authentication	自重 Dead weight	拉力 Pull	冲击力 Impact force
RG-Safety belt Pro	涤纶加强丝 Polyester reinforcing filament	CE EN361	1.98kg	>1500kg	100kg

可调节腰带, 穿戴更牢固, 更具舒适性  
Adjustable waistband, stronger and more comfortable to wear

#### 适用范围 Scope of application

登山攀岩、拓展、消防救援、高空作业、工程保护、吊装等, 应与防坠器、安全绳配套使用  
Climbing, expansion, fire rescue, aerial work, engineering protection, hoisting, etc. It should be used with anti-falling device and safety rope.

1 inch = 25.4 mm 1 m = 3.28 ft



30L: X=27.5 Y=18CM  
45L: X=32.5 Y=22CM

### 户外多功能绳索收纳双肩包 Rope bag

型号 Model	收纳绳长 chain length	材质 Material	尺寸 Size
RG-RB-30L	30m	1000D PVC 夹网布	A=28 B=60CM
RG-RB-45L	45m	1000D PVC 夹网布	A=32 B=69CM

#### 抗撕裂·牢固·高承重·底部漏水孔设计

Tear Resistance • Firmness • High Bearing and Design of Bottom Leakage Hole

1 inch = 25.4 mm 1 m = 3.28 ft



### 全身安全带(标准版) Body safety belt(Standard)

型号 Model	材质 Material	认证 Authentication	自重 Dead weight	拉力 Pull	冲击力 Impact force
RG-Safety belt Std	涤纶加强丝 Polyester reinforcing filament	GB 6095-2009 AS/NZS1891.1-2007 EN361-2002	1.98kg	>2900kg	100kg

可调节腰带, 穿戴更牢固, 更具舒适性  
Adjustable waistband, stronger and more comfortable to wear

#### 适用范围 Scope of application

登山攀岩、拓展、消防救援、高空作业、工程保护、吊装等, 应与防坠器、安全绳配套使用  
Climbing, expansion, fire rescue, aerial work, engineering protection, hoisting, etc. It should be used with anti-falling device and safety rope.

1 inch = 25.4 mm 1 m = 3.28 ft

安全索具 SAFETY RIGGING



防坠器

Anti-falling safety device

型号 Model	活动范围 Scope of activities	工作负荷 WLL	整体破坏负荷 Overall failure load	自重 Dead weight
RG-ASD-3	3m	100kg	≥8900kg	2.4kg
RG-ASD-5	5m	100kg	≥8900kg	2.5kg
RG-ASD-10	10m	100kg	≥8900kg	3.8kg
RG-ASD-15	15m	100kg	≥8900kg	5.1kg
RG-ASD-20	20m	100kg	≥8900kg	7kg
RG-ASD-30	30m	100kg	≥8900kg	12kg

1 inch = 25.4 mm 1 m = 3.28 ft



手扳葫芦

Lever hoist

型号 Model	链长 chain length	工作负荷 WLL	自重 Dead weight
RG-LH-1500	3m	1500kg	11kg
RG-LH-2000	3m	2000kg	11kg
RG-LH-3000	3m	3000kg	20kg

合金钢罩壳 • 锰钢吊钩 • 锰钢链条 • 优质齿轮

ALLOY STEEL COVER SHELL • MANGANESE STEEL HOOK • MANGANESE STEEL CHAIN • HIGH QUALITY GEAR

1 inch = 25.4 mm 1 m = 3.28 ft



线槽板

Cable protector

型号 Model	外观尺寸 Size	内槽尺寸 Notch size	最高负载 Max Load Bearing	材料 Material	自重 Material
RG-2K-35	1000(L)x250(W)x50(H)mm	35x35mm	20T	Lid:SEBS base: Compounded Rubber	6kg
RG-3K-65	800(L)x500(W)x75(H)mm	65x65mm	20T	Lid:SEBS base: Compounded Rubber	20kg
RG-4K-50	800(L)x500(W)x65(H)mm	50x50mm	20T	Lid:SEBS base: Compounded Rubber	16kg
RG-5K-30	800(L)x500(W)x50(H)mm	30x30mm	20T	Lid:SEBS base: Compounded Rubber	13kg

1 inch = 25.4 mm 1 m = 3.28 ft



## 圆筒电镀钢丝吊带 SOFT STEEL

圆筒电镀钢丝吊带具有和普通圆筒吊带一样的外观，但内里为钢丝芯而不是尼龙内芯。灵活如普通圆筒吊带，圆筒电镀钢丝吊带不仅有更好的防火功能，还可用于普通圆筒吊带无法使用的环境。圆筒电镀钢丝吊带外观为黑色，附含一张灰色的识别标签和一个巧妙隐藏钢丝芯的观察窗，可提供额定工作负荷为2吨的圆筒电镀钢丝吊带，产品符合CE标准并获得BGV1 C1认证。

The Soft Steel has a normal outside webbing for soft slings, but instead of the polyamide core the Soft Steel has a core of steel wires. As flexible as a normal soft sling, the steel wires within the Soft Steel have a much better fire resistance. The Soft Steel can be used in circumstances where the nor-mal soft slings are not allowed. The outside webbing is black, including a grey identification label and a cleverly hidden inspection window to inspect the steel wires within the SoftSteel. Available with a WLL of 2000 kg, the Soft Steel complies with all CE regulations and is BGV C1 approved.



最小弯曲半径 R=6mm  
MIN.Bending radius R=6mm



### 规格 Dimensions

型号 MODEL	材料 MATERIAL	工作长度 WORKING LENGTH	最大承重 MAX CAPACITY
TD-S2-2	Steel wire rope	2米 2 Meter	2吨 2 Ton
TD-S2-3	Steel wire rope	3米 3 Meter	2吨 2 Ton

1 inch = 25.4 mm 1 lbs = 0.453kg

## RES 圆筒尼龙吊带 RES CIRCULAR ROPE



### RES圆筒尼龙吊带

RES圆筒尼龙吊带，结合吊钩和其他吊具使用，专为物体的吊装与起重而设计。它具有高张力，质轻、质软、灵活性好等特征，能满足各种场合的应用。

产品内芯由芳纶纤维和高性能的聚乙烯制成，表面材质为聚酯纤维，外表柔软，可避免刮伤或刮花负载，并且能灵活地适应不规整形状的负载。产品外观为黑色，附含一张灰色的识别标签，可通过标签查看额定工作负荷等产品信息。

RES Circular Rope, designed for use in rigging and lifting, which when combine with hook and other lifting objects. It features high tension, lightweight and flexibility as well as pliability that it is ideal for a wide variety of applications.

Each RES Circular Rope is produced of Aramid fiber and high performance polyethylene in the core and with a cover of polyester. The external polyester webbing is soft to avoid scratching fragile or delicate loads, and it is flexible to conform to irregularly shaped loads. They are manufactured with a colored fabric jacket based on the weight capacities of the sling. This makes it easy to recognize the weight ratings at a glance. Each sling also has identification tags to indicate size, type, and capacity.

### 规格 Dimensions

型号 MODEL	材料 MATERIAL	工作长度 WORKING LENGTH	最大承重 MAX CAPACITY
TD-R2-1.5	100% PES	1.5米 1.5 Meter	2吨 2 Ton
TD-R2-2	100% PES	2米 2 Meter	2吨 2 Ton
TD-R2-3	100% PES	3米 3 Meter	2吨 2 Ton

1 inch = 25.4 mm 1 lbs = 0.453kg