



## 插销桁架灯架系列

## Quick Mount Lighting Truss Series


TD-Q6136R-50

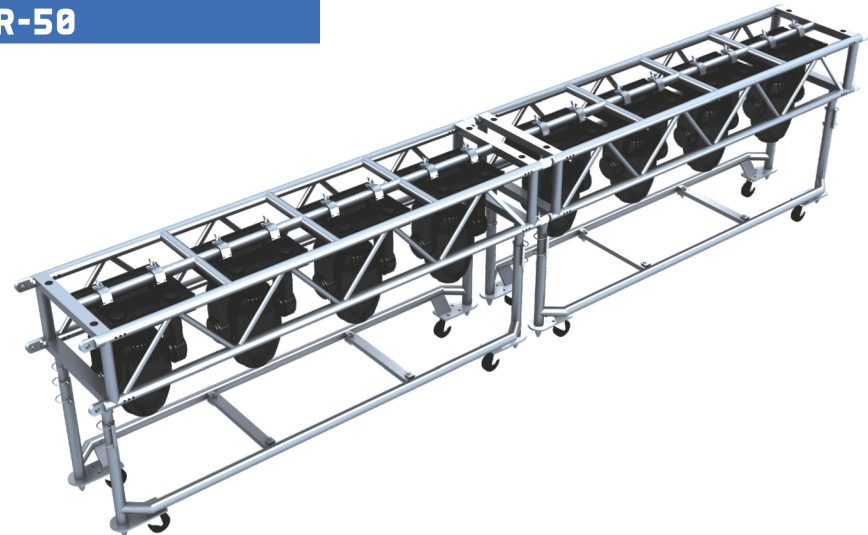

俯视图  
Top view

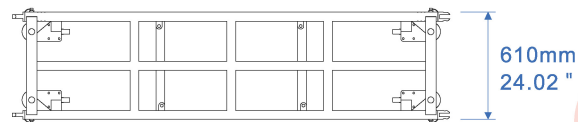

侧视图  
Side view

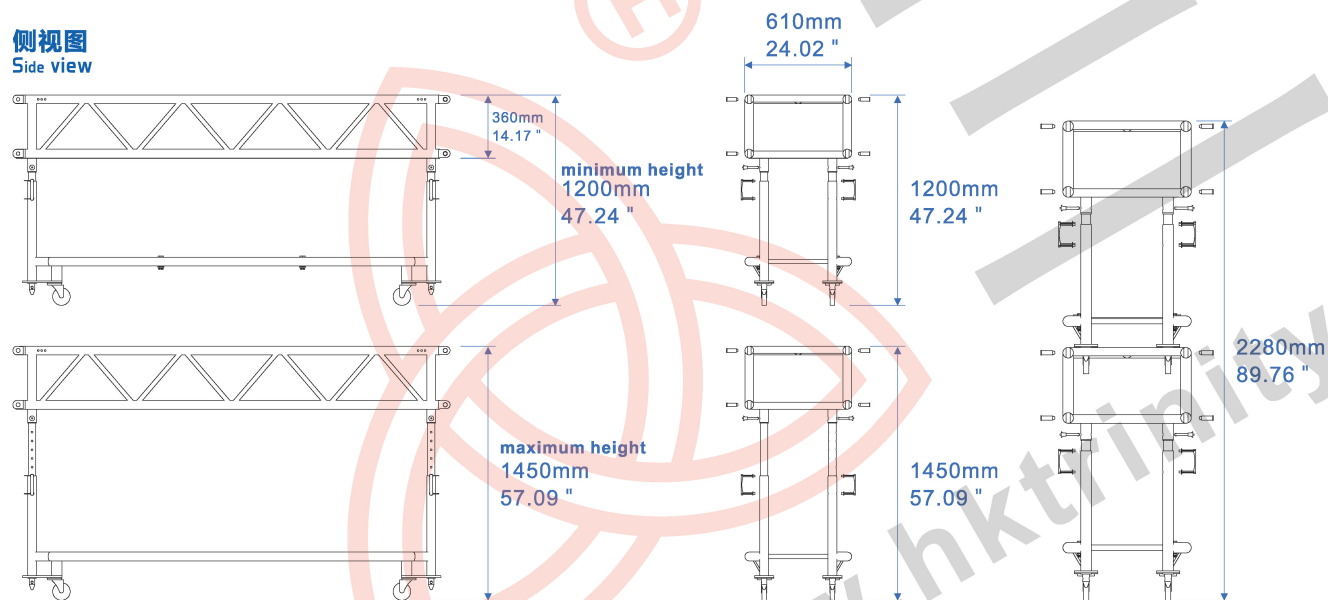

### 规格 Dimensions

形状 Shape	灯架 Lighting Truss	灯架 Lighting Truss
材质 Material	EN AW 6082 T6	EN AW 6082 T6
主管 Main Tubes	50x4 mm	1.97 x 0.16 in
副管 Braces	25 x 2 mm	0.98 x 0.08 in
重量 Weight	≈ 27.4 kg/m	≈ 18.1 lbs/ft


1 inch = 25.4 mm 1 m = 3.28 ft 1 lbs = 0.453kg

### TD-Q6136R-50 铝合金桁架允许荷载表

### ALLOWABLE LOADING

跨度 SPAN		平均分布负载UDL Uniformly Distributed Load		下垂值 DEFLECTION		中心点负载CPL Centre Point Load		下垂值 DEFLECTION		三段单点负载TPL single load third points		四段单点负载QPL single load fourth points		五段单点负载FPL single load fifth points		自重 total weight
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch	kg	lbs	kg	lbs	kg	lbs	kg
3	9.8	920.0	619.2	2.5	0.098	2900.0	6401.8	2.4	0.094	1450.0	3200.9	975.0	2152.3	780.0	1721.9	82.2
4	13.1	710.0	477.8	3.3	0.130	2320.0	5121.4	3.1	0.122	1430.0	3156.7	942.0	2079.5	761.0	1679.9	109.6
5	16.4	555.0	373.5	5.5	0.217	1860.0	4106.0	5.2	0.205	1395.0	3079.5	920.0	2030.9	700.0	1545.3	137.0
6	19.7	472.0	317.7	7.2	0.283	1575.0	3476.8	6.8	0.268	1165.0	2571.7	888.0	1960.3	656.0	1448.1	164.4
7	23.0	368.0	247.7	8.8	0.346	1318.0	2909.5	8.3	0.327	985.0	2174.4	801.0	1768.2	606.0	1337.7	191.8
8	26.2	286.0	192.5	12.0	0.472	1150.0	2538.6	9.9	0.390	960.0	2119.2	680.0	1501.1	539.0	1189.8	219.2
9	29.5	225.0	151.4	14.3	0.563	1010.0	2229.6	13.2	0.520	758.0	1673.3	583.0	1287.0	501.0	1106.0	246.6
10	32.8	170.0	114.4	16.8	0.661	908.0	2004.4	15.9	0.626	670.0	1479.0	490.0	1081.7	462.0	1019.9	274.0
11	36.1	142.0	95.6	19.6	0.772	825.0	1821.2	18.6	0.732	600.0	1324.5	445.0	982.3	345.0	761.6	301.4
12	39.4	120.0	80.8	22.3	0.878	730.0	1611.5	19.8	0.780	540.0	1192.1	365.0	805.7	300.0	662.3	328.8
13	42.6	105.6	71.1	32.5	1.280	645.0	1423.8	28.9	1.138	500.0	1103.8	320.0	706.4	265.0	585.0	356.2
14	45.9	89.6	60.3	40.2	1.583	582.0	1284.8	36.8	1.449	438.0	966.9	282.0	622.5	245.0	540.8	383.6
15	49.2	73.2	49.3	46.9	1.846	530.0	1170.0	42.6	1.677	400.0	883.0	265.0	585.0	219.0	483.4	411.0
16	52.5	63.5	42.7	55.7	2.193	485.0	1070.6	51.3	2.020	355.0	783.7	246.0	543.0	198.0	437.1	438.4
17	55.8	57.2	38.5	62.4	2.457	450.0	993.4	59.1	2.327	334.0	737.3	226.0	498.9	182.0	401.8	465.8
18	59.0	48.1	32.4	67.3	2.650	405.0	894.0	60.4	2.378	310.0	684.3	206.0	454.7	168.0	370.9	493.2
19	62.3	43.5	29.3	73.5	2.894	395.0	872.0	70.2	2.764	282.0	622.5	198.0	437.1	150.0	331.1	520.6
20	65.6	38.4	25.8	80.8	3.181	368.0	812.4	73.6	2.898	268.0	591.6	178.0	392.9	142.0	313.5	548.0
21	68.9	34.8	23.4	85.6	3.370	336.0	741.7	79.8	3.142	250.0	551.9	165.0	364.2	135.0	298.0	575.4
22	72.2	31.2	21.0	90.8	3.575	308.0	679.9	83.6	3.291	235.0	518.8	159.0	351.0	128.0	282.6	602.8
23	75.4	29.6	19.9	95.6	3.764	295.0	651.2	92.1	3.626	216.0	476.8	148.0	326.7	125.0	275.9	630.2
24	78.7	27.3	18.4	108.0	4.252	286.0	631.3	102.0	4.016	198.0	437.1	136.0	300.2	116.0	256.1	657.6

分解图  
Exploded View

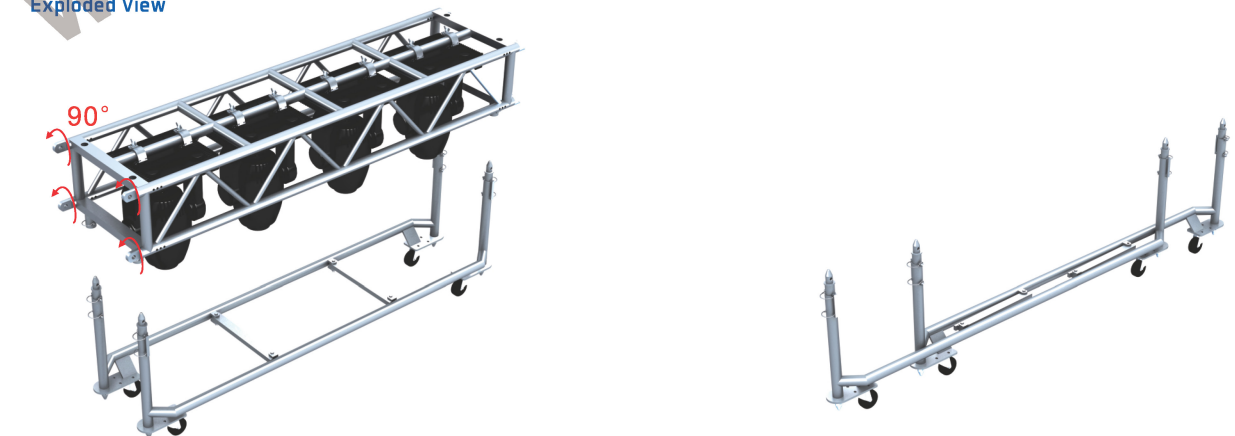

特点  
Features:

1. 叉型连接头可旋转90°
2. 带轮子底座可折叠设计,节省存储空间
3. 孔位可视化方便调节高度
4. 具有高耐磨性的脚轮
5. 操作简易,无需借助推车
6. 快速安装和拆卸
7. 适用于巡演及任何场地

1. 90° Rotating fork connection
2. Cart with Folding design, saving the storage space
3. Visualized holes alignment for adjustable height
4. The castors with a high wear resistance
5. Easy to handle, without additional dolly
6. Fast install & dismant
7. Ideal for touring and any venue