



插销桁架系列  
Quick Mount Series



TD-F02635R-50

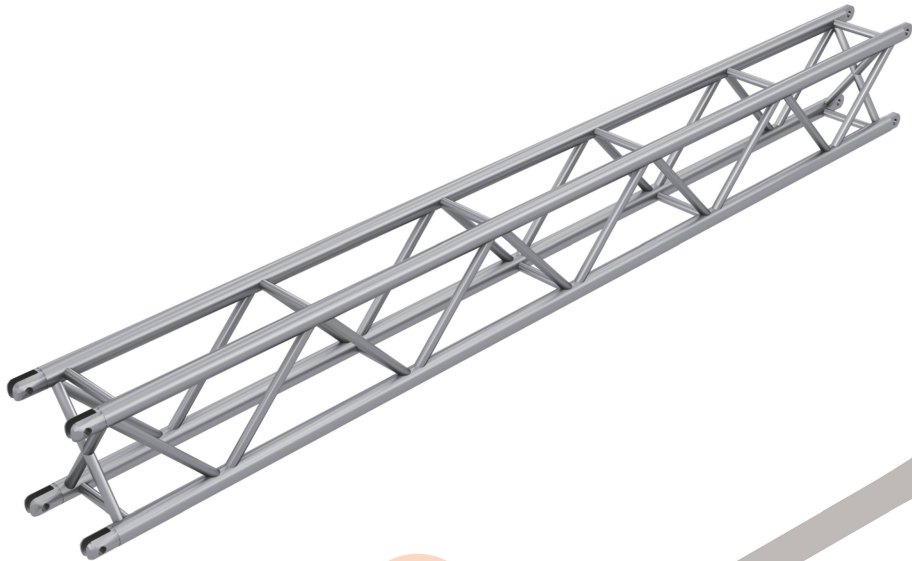

俯视图  
Top view



侧视图  
Side view



规格 Dimensions		
形状 Shape	四方形 Square	四方形 Square
材质 Material	EN AW 6082 T6	EN AW 6082 T6
主管 Main Tubes	50 x 4 mm	1.97 x 0.16 in
副管 Braces	25 x 3 mm	0.98 x 0.12 in
重量 Weight	≈ 23.68 kg/m	≈ 15.94 lbs/ft
1 inch = 25.4 mm    1 m = 3.28 ft    1 lbs = 0.453kg		

TD-F02635R-50 铝合金桁架允许荷载表  
ALLOWABLE LOADING

跨度 SPAN		平均分布负载UDL Uniformly Distributed Load		下垂值 DEFLECTION		中心点负载CPL Centre Point Load		下垂值 DEFLECTION		三段单点负载TPL single load third points		四段单点负载QPL single load fourth points		五段单点负载FPL single load fifth points		自重 total weight
m	ft	kg/m	lbs/ft	mm	inch	kg	lbs	mm	inch	kg	lbs	kg	lbs	kg	lbs	kg
2	6.6	1420.0	955.7	1.0	0.039	3000.0	6622.5	0.8	0.031	1520.0	3355.4	1010.0	2229.6	841.0	1856.5	37.7
4	13.1	725.0	487.9	2.5	0.098	2450.0	5408.4	2.2	0.087	1430.0	3156.7	986.0	2176.6	788.0	1739.5	65.7
6	19.7	480.0	323.0	6.4	0.252	1560.0	3443.7	6.0	0.236	1205.0	2660.0	793.0	1750.6	658.0	1452.5	93.7
8	26.2	285.0	191.8	10.0	0.394	1230.0	2715.2	9.6	0.378	902.0	1991.2	582.0	1284.8	479.0	1057.4	121.7
10	32.8	182.0	122.5	14.9	0.587	925.0	2041.9	13.8	0.543	680.0	1501.1	460.0	1015.5	382.0	843.3	149.7
12	39.4	100.0	67.3	18.6	0.732	760.0	1677.7	16.7	0.657	553.0	1220.8	368.0	812.4	308.0	679.9	177.7
14	45.9	135.0	90.9	26.8	1.055	630.0	1390.7	23.8	0.937	468.0	1033.1	315.0	695.4	253.0	558.5	205.7
16	52.5	100.0	67.3	36.5	1.437	532.0	1174.4	34.2	1.346	396.0	874.2	267.0	589.4	220.0	485.7	233.7
18	59.0	82.6	55.6	43.1	1.697	460.0	1015.5	39.6	1.559	348.0	768.2	231.0	509.9	189.0	417.2	261.7
20	65.6	45.3	30.5	50.2	1.976	392.0	865.3	46.5	1.831	295.0	651.2	190.0	419.4	161.0	355.4	289.7
1 inch = 25.4 mm		1 lbs = 0.453kg														

- 加载数据只适用于静态负荷和两个支撑点。
- 表中所列荷载均为恒荷载，未考虑动力系数。
- 加载数据基于BS-7905-2/ANSI E1.2-2006/CWA 15902-2, GB/T5237。在考虑安全因素时，加载数据应增加0.8。
- 桁架的自重已考虑。
- 适用桁架高度350mm, 弦杆为Φ50\*4mm圆管, 腹杆为Φ25\*3mm圆管。
- 特别注意: 超过20米的结构，如果由多个部分组合起来而构成的总长度，将会造成10 - 15%弯曲的可能性(在同等荷载的条件下)。允许偏差，负载数据不变。
- Loading figures only valid for static loads and spans with two supporting points.
- Spans must be supported at each end.
- If dynamic loads or wind loads are involved, or more supporting points are applied, contact Trinity Customer Service for details.
- Loading figures are based on BS 7905-2/ANSI E1.2-2006/CWA 15902-2, GB/T5237. The loading data should multiply 0.8 for Safety factor consideration.
- The self-weight of the trusses has already been taken into account.
- Suitable for trusses with design height of 350mm, Main tubing Φ 50 \* 4mm, brace tubing Φ 25 \* 3mm.
- Special attention to structure over 20m, if multiple sections combined to make up the total length: Additional Reflection 10 to 15%deflection should be allowed, the allowable loading unchanged.